


# CTSA Series of Split core Current Transformers

CTSA Series (secondary output mA or 0.333-3.53V, Suitable for measuring the cable current)

The YUANXING CTSA series of split core style current transformers are designed for fast and easy installation. The split core design permits non-contact current measurements through magnetic field induction without disconnecting cables circuits for CT installation. This method permits a safer, easier and portable current measurement.



## FEATURES


- Low cost
- 4 standard sizes
- Split core design, safer, easier installation, and portable.

## APPLICATIONS


- Electrical lines and equipment of current measurement, control and protection
- Measures AC current flow to electric motors, lighting, air condition equipment, etc. Compatible with HVAC temperature control, power management, building automation systems.

## SPECIFICATIONS

- Rated Primary Current :5-400Aac
- Rated Second Voltage :0.333Vac
- Frequency Range:50-400Hz
- Operating Temperature:-15°C to 50°C
- Insulating Resistance:100M Ohms @ 500Vdc
- Dielectric Strength:2,500 Vac/min • ETL-approved
- Case Material:nylon ,Resin94-V0 • RoHS compliant
- Highest Voltage for Equipment Um (rms):≤600Vac
- Leads: 240mm (0.8Foot), UL1015, Twisted Pair, 0.34mm<sup>2</sup> (22AWG), The length can be customized.

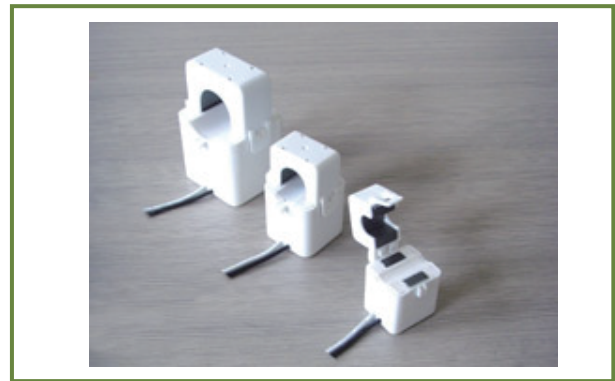

## DIMENSION DRAWING

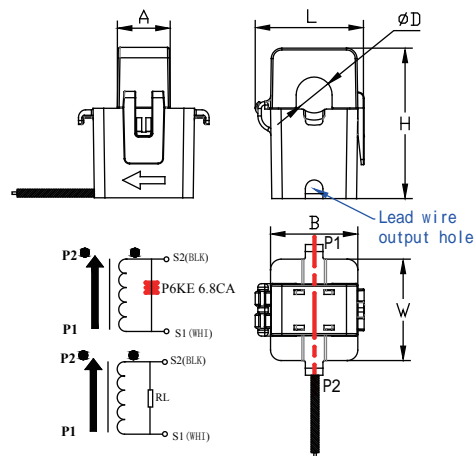

## PERFORMANCES

Part Number	Ratio	Measuring			Protection		Frequency ( Hz )	OutlineDimensions ID-L-W-H -A-B(mm/inch)
		Rated Input (A)	Accuracy class	Phase linear error	Rated Accuracy Limit Primary Current (A)	Limit error		
CTSA005	1000:1 2000:1 2500:1 3000:1	5,10,15	1.0,3.0	--	--	--	50 to 1 KHz	5.0/25.0/22.5/34.5 0.196/0.984/0.886/1.358
CTSA010		5,10,20,50,75	1.0,3.0	≤30'	200	5%	50 to 1 KHz	10.0/30.8/28.8/42.8/15/24.8 0.394/1.213/1.134/1.685/0.591/0.976
CTSA016		50,100,150	0.5,1.0	≤30'	300	5%	50 to 1KHz	16.0/37.8/33.9/49/19.9/30.7 0.630/1.488/1.335/1.929/0.783/1.209
CTSA024		100,150,200, 250	0.5,1.0	≤30'	540	5%	50 to 1KHz	24.0/53.3/40.2/70/20.3/45 0.945/2.098/1.583/2.756/0.799/1.772
CTSA035		200,300,400, 500	0.5,1.0	≤30'	600	5%	50 to 1KHz	35.0/67/42.8/83/22.5/58.2 1.378/2.638/1.685/3.268/0.886/2.291

Note: Output voltage signal, recommended priority of 0.333V



**YUANXING Electronics Co., Ltd.**

Phone: +86-533-381-8450  
Fax: +86-533-381-8724

Pioneering Park, Science & Technology Industry Zone,  
Zhangdian, Zibo, Shandong, PRC 255095

[www.yuanxing.net](http://www.yuanxing.net)  
[sales@yuanxing.net](mailto:sales@yuanxing.net)

CHARACTERISTIC CURVE

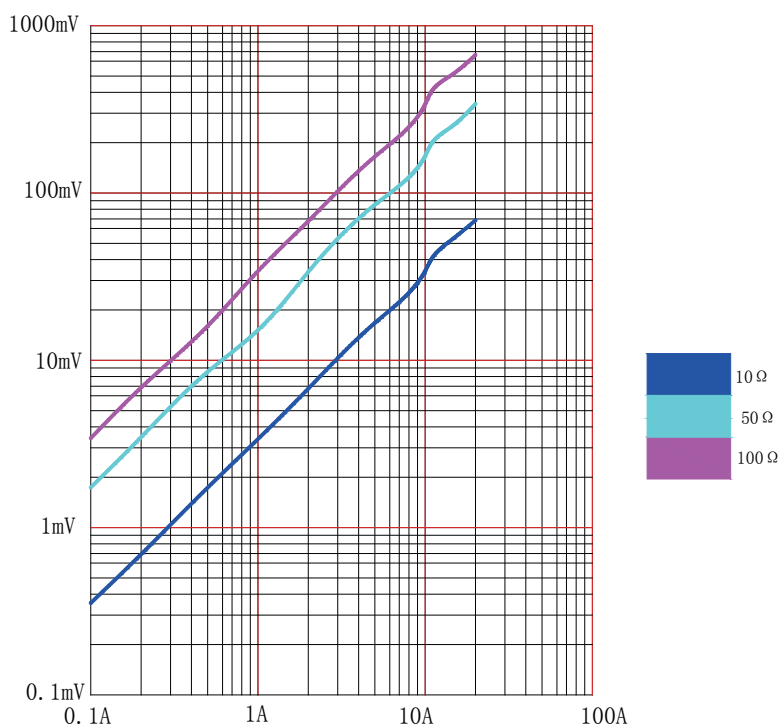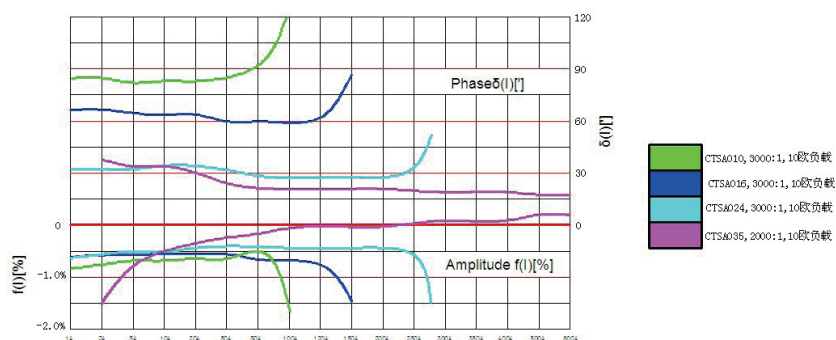

CTSA005, the turn ratio is 1:3000